



**ATLAS
TAPES**


ATHENS
68 Varis Avenue
16673 Voula, Greece
Tel.: +30 210 8995388

ATALANTI
3rd km Skala Atalanti Road
35200 Atalanti, Greece
Tel.: +30 22330 23725

www.atlas-tapes.gr
info@atlas-tapes.gr

MASKING TAPE 6290

TECHNICAL DATA SHEET

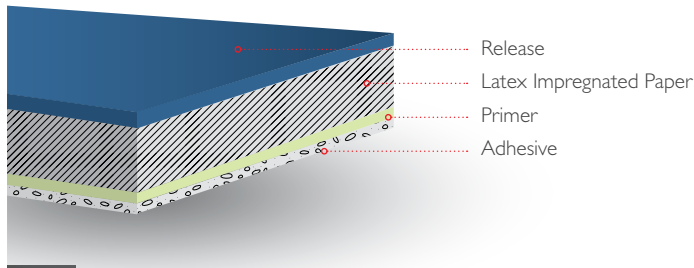

DESCRIPTION:

Saturated semi crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive. Recommended and tested for 60 minutes 60°C oven use, and 80°C for 30 minutes. Suitable for all general masking applications.

APPLICATIONS:

- Guaranteed spray painting automotive oven use in 60°C for 60 minutes.
- General masking
- Domestic DIY and Industrial general painting
- Holding
- Sealing
- Fixing
- Light duty packaging

PROPERTIES:

- 60°C oven use for 60 minutes.
- Suitable for both metallic and plastic automotive surfaces
- Residue free removal
- Excellent tape to tape adhesion
- Solvent and thinner resistant
- High initial tack
- Easy tear
- Excellent conformability
- Suitable for water and solvent based paints
- Easy curving
- Easy application on uneven surfaces

ALL ABOUT TAPES



NOMINAL VALUES:

Backing

Impregnated Crepe Paper

Adhesive

Solvent-based, Natural Rubber

Tensile Strength MD

85 ± 20 (N/25mm)

TM 5004 by Afera

Elongation at Break MD

9 ± 2 (%)

TM 5004 by Afera

Adhesion to Steel

4.5 ± 1 (N/25mm)

TM 5001 by Afera

Rolling Ball Task

Under 3 (cm)

PSTC-6 (PSTC)

Paper thickness

95 ± 15 (mic)

Total thickness

115 ± 20 (mic)

Application Range

60°C for 60 minutes

Paper Colors

White Sharp Yellow Yellow Brown 84

Adhesive Color

Transparent